


SHOOTING PARAMETERS
6-Fold Off End
Shot by G.S.I. PTY 910
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 13.4 m
Average Shot Offset 141 m
Charge Size 50 lb
Average Seis Depth 14 m

RECORDING PARAMETERS
System 9,000
Record Length 5.0
Sample 2 ms
GAGC Trip 0788 Raw 80db/μ
Init 3.6 db Final 100db
Filters Hi 75 cps 24db/oct
Lo 8 cps 24db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
α = 4.0 db/sec
From 0 sec to 4.0 sec
Water Velocity 1494 mps
Replacement Vel 1494 mps

DECONVOLUTION
Time Varying ARD I
Filter Length 212 msec
Gate Length 2200 msec
No of Gates/Trace 2
Initial Times, Gate No 1
Tr1: 2 sec, Tr2: 0.46 sec
Final Times, Gate No 2
Tr4: 5 sec, Tr2: 3.76 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes Diversity Stack NO
First Break Suppression
Tr 0. sec Tr4 0.8 sec
Tr2 0.4 sec Tr5 1.0 sec
Tr3 0.6 sec Tr6 1.2 sec

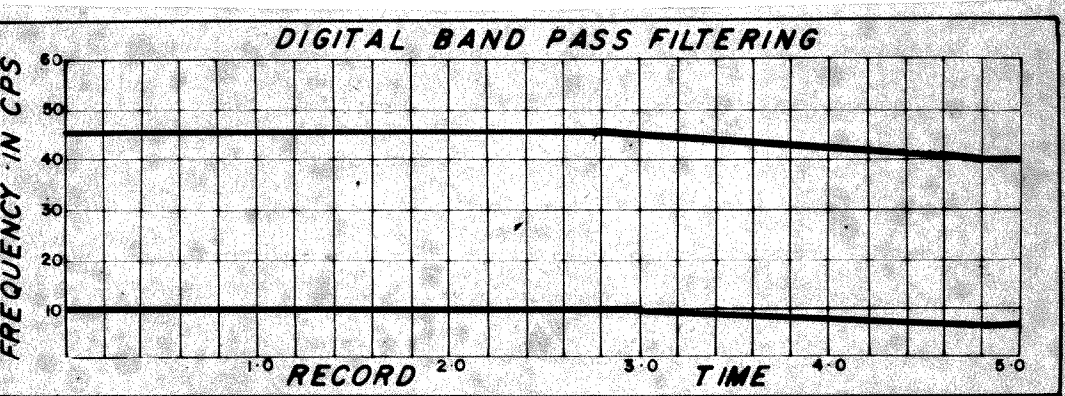

DISPLAY
Analog Filters OUT-OUT
Straight Gain
+18 - 0 - 20 - 2
Tape HTL 2260

REQ. No. L-1291
Section No. 2130-C
System Code MSTV-2
Assembled by V. GEADA
Checked by B. BIGGS

NE

