


SHOOTING PARAMETERS
6-Fold Off End
Shot by G.S.I. PTY 910
Cable Length 1600m
Group Interval 67 m.
Shot Point Interval 141 m.
Average Shot Offset 160m.
Charge Size 50 lb.
Average Seis Depth 15 m.

RECORDING PARAMETERS
System 9,000
Record Length 5.0
Sample 2m
GAGC Tip 078 sRate 93db/s
Int 3.6 db Final 100db
Filters Hi 75 cps 24db/oct
Lo 8 cps 24db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
 $\alpha = 4.0$ db/sec
From 0 sec to 4.0 sec
Water Velocity 1494 mps
Replacement Vel 1494 mps

DECONVOLUTION
Time Varying ARD 1
Filter Length 212 msec
Gate Length 2200 msec
No. of Gates Trace 2
Initial Times Gate No 1 -
Tr 1 2 sec Tr 2 0.46 sec
Final Times Gate No 2 -
Tr 1 4.5 sec Tr 2 376 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes Diversity Stack NO
First Break Suppression
Tr 1 0. sec Tr 4 0.8 sec
Tr 2 0.4 sec Tr 5 1.0 sec
Tr 3 0.6 sec Tr 6 1.2 sec

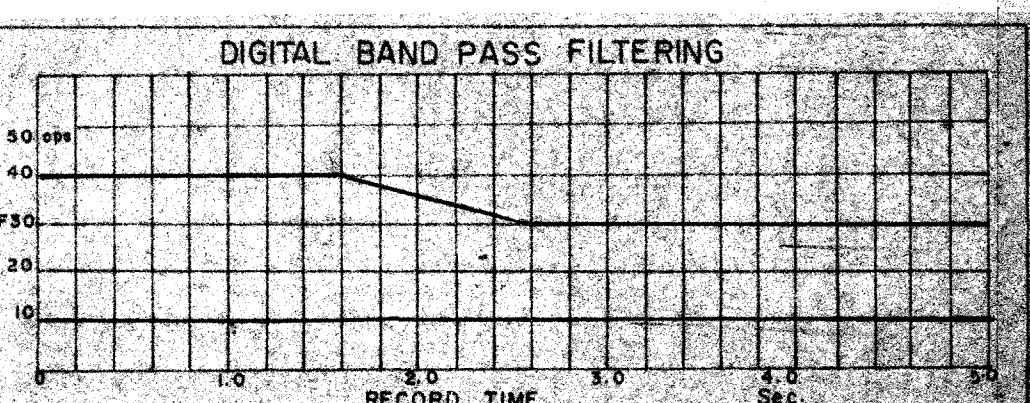

EQUALIZATION
 $T_1 = 1.0$ sec $T_2 = 4.5$ sec

DISPLAY
Analog Filters OUT-OUT
Straight Gain
+18 +6 -12 +12
Tape HTL - 2649

REQ. No. L-1317
Section No. 2129-C
System Code MSTV-2
Assembled by V. GEADA
Checked by B. B/G-65

