

SHOOTING PARAMETERS

6-Fold Off End
Shot by G.S.I. PTY 906
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 134 m
Average Shot Offset 160 m
Charge Size 50 lb
Average Seis. Depth 15 m

RECORDING PARAMETERS


System 9,000
Record Length 5:0
Sample 2 ms
GAGC Trip 0.75s Rate 80db/s
Init 43 db Final 93 db
Filters Hi 75 cps. 24 db/oct
Lo 8 cps. 24 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO	
TAR	
$\alpha = 3.0 \text{ db/sec}$	
From	0 sec to 3.0 sec
Water Velocity 1524 mps	
Replacement Vel. 1524 mps	

DECONVOLUTION

Time Invariant ARD
Filter Length : 252 msec
Gate Length : 2800 msec
No of Gates / Trace |
Initial times, :
Tr1 2 sec, Tr 24 0.9 sec
Final times, :
Tr1 4.0 sec, Tr 24 3.7 sec

6-FOLD STACK	
Optimum Wide Band Stack	
RNMO Yes Diversity Stack NO	
First Break Suppression	
T ₁ 0 sec	T ₄ 1-2 sec
T ₂ 0-6 sec	T ₅ 1-4 sec
T ₃ 1-0 sec	T ₆ 1-6 sec

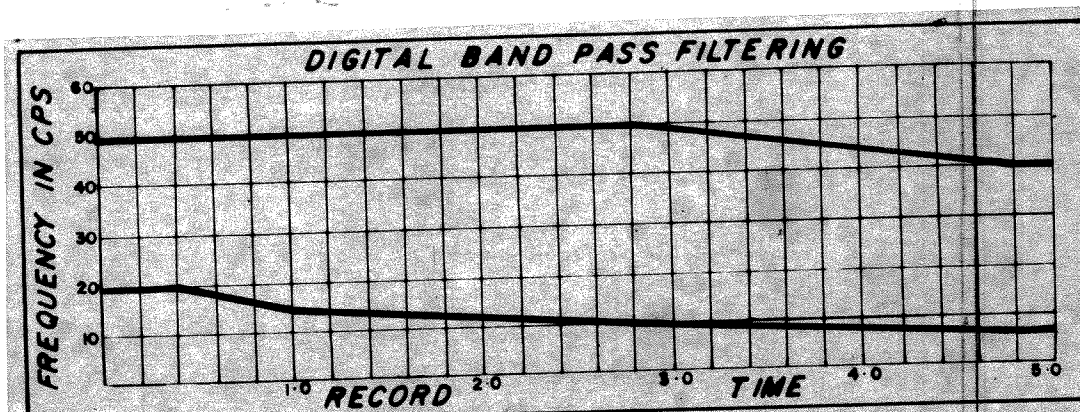

DISPLAY

Analog Filters OUT -OUT
Straight Gain
+ 18 + 0 - 20 = - 2

Tape HTL 2105

REQ. N°	L-4591
Section N°	2080-C
System Code	MSTV-2
Assembled by	V. GEADA
Checked by	Jane Molina

