


SHOOTING PARAMETERS
6-Fold Off End
Shot by G.S.I. PTY 906
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 134 m
Average Shot Offset 140m
Charge Size 50 lb
Average Sea Depth 12 m

RECORDING PARAMETERS
System 9,000
Record Length 5.0 sec
Sample 2 ms
GAGC Trip 0.47s Rate 80 db/s
Init 4 db Final 100 db
Filters Hi 75 cps 24 db/oct
Lo 8 cps 24 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
ec = 3.0 db/sec
From 0 sec to 3.0 sec
Water Velocity 1500 mps
Replacement Vel 1500 mps

DECONVOLUTION
Time Invariant ARD I
Filter Length 252 msec
Gate Length 2600 msec
No of Gates/Trace 1
Initial times Gate No 1 :-
Tr 1 0.23 sec, Tr 2 4.0 sec
Final times Gate No 1 :-
Tr 1 0.23 sec, Tr 2 4.0 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes Diversity Stack Yes
First Break Suppression
T₁ 0 sec T₂ 0.6 sec
T₃ 0.9 sec T₄ 1.0 sec
T₅ 0.4 sec T₆ 1.2 sec

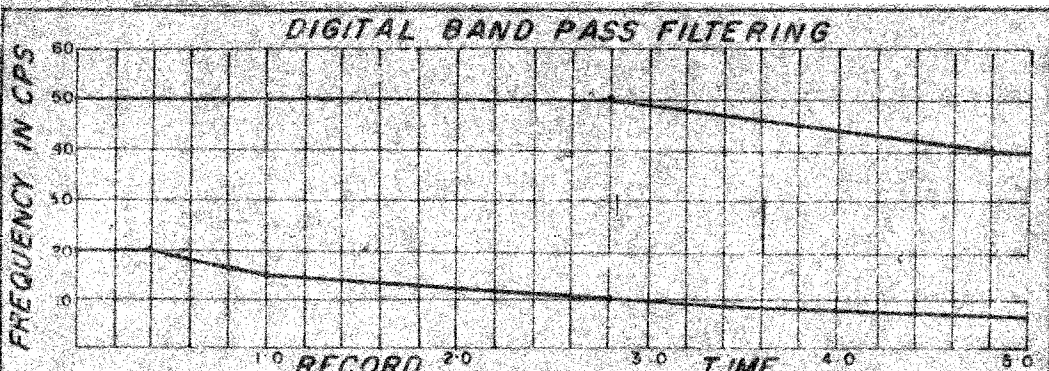

DISPLAY
Analog Filters OUT-OUT
Straight Gain
+18 +4 -20 +2
Tapes HTL 4147
HTL

REQ. N° L-4246
Section N° 4050C
System Code MSTV-2
Assembled by *R. K. K.*
Checked by *R. K. K.*

NNE

