


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by G.S.I. PTY 910  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 134m  
 Charge Size 50 lb  
 Average Seis. Depth 15 m

**RECORDING PARAMETERS**  
 System 9,000  
 Record Length 5.0 secs.  
 Sample 2 ms  
 GAGC Trip 011 s, Rate 80db/s  
 Init. 43 db, Final 100 db  
 Filters Hi 75 cps, 24 db/oct  
 Lo 8 cps, 24 db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 $\epsilon = 4.0$  db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1500 mps  
 Replacement Vel. 1500 mps

**DECONVOLUTION**  
 Time variant ARD I  
 Filter Length 252 msec  
 Gate Length 2600 msec  
 No of Gates/Trace 1  
 Initial times, Gate No 1 :-  
 Tr 1 1.1 sec, Tr 2 0.6 sec  
 Final times, Gate No 1 :-  
 Tr 1 3.7 sec, Tr 2 3.2 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes, Diversity Stack Yes  
 First Break Suppression  
 $T_1$  0 sec  $T_2$  0.8 sec  
 $T_3$  0.4 sec  $T_4$  1.0 sec  
 $T_5$  0.6 sec  $T_6$  1.2 sec

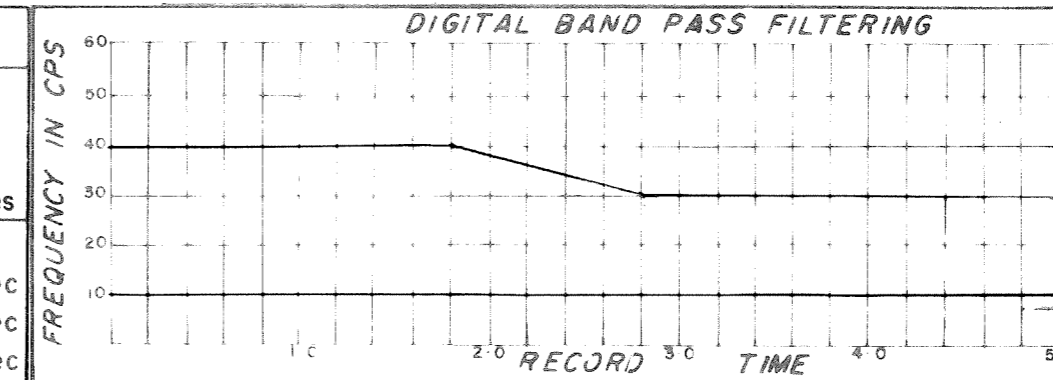

**DISPLAY**  
 Analog Filters OUT-OUT  
 Straight Gain  
 + 12 + 0 - 14 = - 2  
 Tape HTL 4 356  
 HTL

REQ. N° L-2571  
 Section N° 4199 C  
 System Code MSTV-2  
 Assembled by *K.F. Kelly*  
 Checked by *W.S.*

NE

118 Meters 144 186 256 360 424 506 534 549 Meters 581  
 H 11140 H 11130 H 11120 H 11110 H 11100 H 11090 H 11080 H 11070 H 11060 H 11051

