

AGIP
ADRIATIC SEA ZONE D
LINED 442 (T.V.F.)
NOVEMBER 1967 GEOPHYSICAL SERVICE INTERNATIONAL LTD


SHOOTING PARAMETERS
6-Fold Off End
Shot by S.I. RTY 908
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 150 m
Average Shot Offset 160m
Charge Size 50 lb
Average Seis. Depth 15 m

RECORDING PARAMETERS
System 8,000
Record Length 5.0
Sample 2 ms
GASC Trip 078 Rate 3000/s
Int 4.3 db final 9.3 db
Filters Hi 75 cps 24 db/oct
Lo 8 cps 24 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
 $\alpha = 3.0$ dp/sec
From 0 sec to 3.0 sec
Water Velocity 1524 mps
Replacement Vel 1524 mps
2ms Anti Alias Filtering

DECONVOLUTION
Time Varying ARD 1
Filter Length 212 msec
Gate Length 2200 msec
No of Gates/Trace 2
Initial Lines Gate No 1
Tr 1 2 sec, Tr 2 4.0-4.5 sec
Final Lines Gate No 2
Tr 1 4.5 sec, Tr 2 3.75 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes Diversity Stack NO
First Break Suppression
Tr 1 0 sec Tr 2 1.0 sec
Tr 1 0.5 sec Tr 2 1.2 sec
Tr 1 0.8 sec Tr 2 1.4 sec

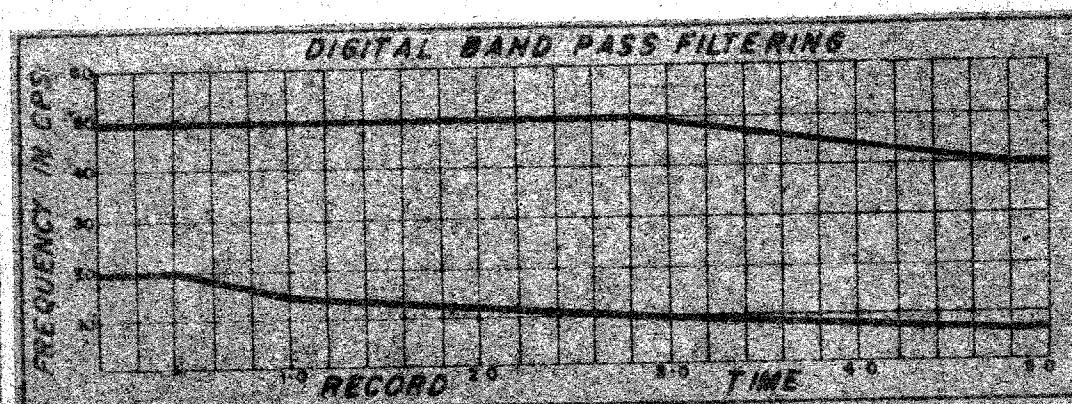

DISPLAY
Analog Filters OUT - OUT
Straight Gate
18° 0' - 18° 0'
Type HTL 2105

REQ. N° L-4570
Section N° 2081-C
System Code M3TV-2
Assembled by V. GRABA
Checked by [Signature]
156

